



API-146+MWF51茶包自動包裝機 Auto Tea Bag Packing Machine

- 適用於平面包裝、三角立體包裝等產品，只需單鍵即可輕鬆切換平面包裝、三角立體包裝二種包裝型式。
- 使用多頭磅秤系統計量充填，可依照需求設定充填重量，不同充填物可設定對應模式運行，以求最佳充填速度及精確度。
- 超音波黏合切割系統，同時兼具安全、效率、節能之優點，程式控制運行，內建過載保護及警報輸出功能。
- 觸控人機面板，提供完整設定功能，可依照需求調整多項參數，提供使用者最大操作彈性。
- 適用不織布、尼龍網布、PET網布、環保玉米澱粉等系列包裝材質及多樣化填充內容物。



1. Two different kinds of tea bags : You can easily change the packing type between pyramid and rectangular with one click.
2. Load cell : We use load cell for weighing system. It is more accurate comparing to traditional volumetric weighing system.
3. Ultrasound Ultrasonic-sealing is safe, efficient and eco-friendly.
In addition, you have more selections of material.
4. Touch screen : You can easily operate the machine with touch screen panel.
It provides comprehensive setting function.
5. Applicable filter : NWF, Nylon, PET, PLA ...





API-146+MWF51茶包自動包裝機

Auto Tea Bag Packing Machine

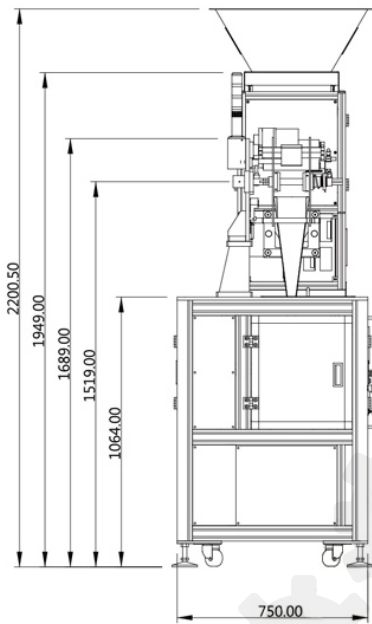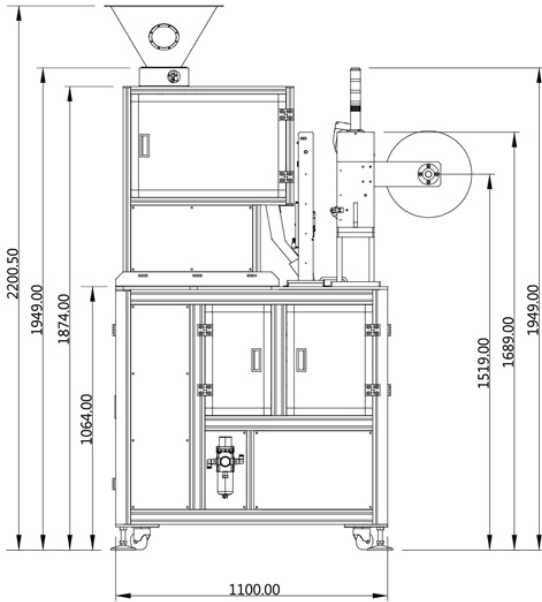

包裝速度
Capacity

Max. 50 bags/min
取決包裝原物料與重量不同而有差異
It depends on ingredient and weight.

包裝材質
Packing Material

不織布, PET, Nylon, PLA...等
NWF, Nylon, PET, PLA...etc

包裝方式
Packing Method

超音波黏合切割
Sealing by ultrasound

成品尺寸
Bag Size

三角立體包 (Pyramid) : 58~78mm
(Pyramid) : 58~78mm

計量方式
Weighing System

多頭秤重系統 (5組荷重元感測器)
5 load-cells

計量範圍
Filling Range

2~12g

電 源
Power Supply

AC220V, 50/60Hz, 3P, 3.0KW
可配合客戶電壓需求做調整
Can be transformed to local voltage

氣壓需求
Pneumatic Pressur

6kg (0.6MPa)

外型尺寸
Dimension

1100mm(L) x 750mm(W) x 2210mm(H)

重 量
Weight

450Kg

標準配備
Standard
Accessories

觸控人機面板、靜電消除裝置、標籤檢知感測、超音波過載保護、包材廢料收集裝置
Touch panel, Static electricity remover, Tag detector, Ultrasound overload protection, filter waste collection device

選購配備
Option

輸送帶
Conveyor

