

API146+VSD50

容積式三角自動包裝機


Pyramid Bag Packing Machine





產品特色 Features

1. 適用於平面包裝、三角立體包裝等產品，只需單鍵即可輕鬆切換三角立體、平面包裝。
2. 超音波黏合切割系統，同時兼具安全、效率、節能之優點，程式控制運行，內建過載保護及警報輸出功能。
3. 觸控人機面板，提供完整設定功能，可依照需求調整多項參數，提供使用者最大操作彈性。
4. 料槽有快速排料裝置機構，方便更換原物料。
5. 機體與充填內容物接觸主件採用(SUS)不銹鋼材質，符合安全衛生標準。
6. 滑動容積式充填系統：容積大小範圍內可任意調整，適合粉粒狀原物料.....。
7. 適用於不織布、PET/尼龍網布、環保玉米澱粉等系列包裝材質及多樣化填充內容物。

1. Two different kinds of tea bags : You can easily change the packing type between pyramid and rectangular with one click.
2. Ultrasonic : Ultrasonic sealing is more safe, efficient and eco-friendly. The machine is equipped with overload protection and alarm.
3. Touch screen : You can easily operate the machine with touch screen panel. It provides comprehensive setting function.
4. Our machine equipped with quick clean device. Easy to change ingredient.
5. Parts contacted with ingredient are all made by stainless steel.
6. Volumetric weighing system is suitable for granule such as tea fanning, ground coffee...etc. It's easy to adjust within the range.
7. You can have more selection of material such as PET/ Nylon mesh, bio-degradable materials.



主要規格及外觀尺寸 Specification & Dimension

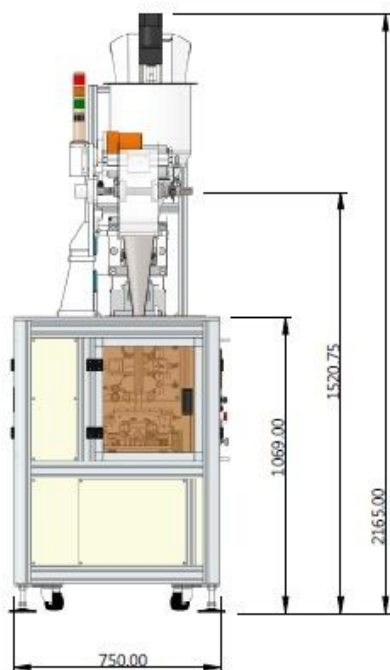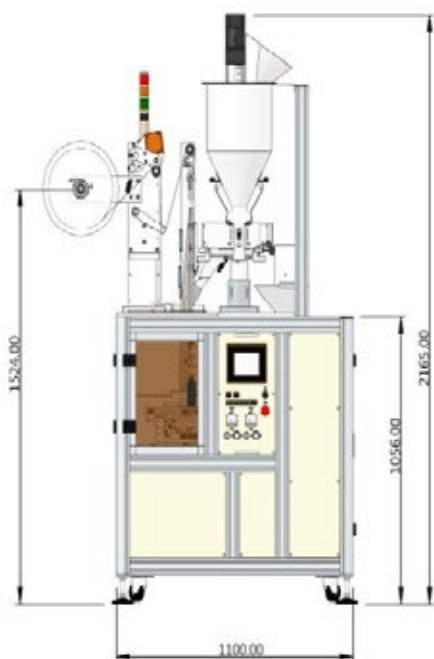

包裝速度 Capacity	Max. 60 bag/min 取決包裝原物料與重量不同而有差異 Packing speed is different according to different size and filling weight.)
包裝材質 Packing Material	不織布, 尼龍網布/PET 網布, PLA....等等 Non woven , Nylon/PET mesh, PLA...etc.
包裝方式 Packing Method	超音波黏合切割 Sealing and cutting by ultrasonic
成品尺寸 Bag Size	三角立體包 Pyramid : 55-78mm 平面包 Plane : L45-100mm W58-78mm
計量方式 Weighing System	滑動容積式充填系統 : 容積大小範圍內可任意調整 Slide doser volumetric weighing system. Easy to adjust
計量範圍 Filling Range	13cc-63cc (包裝原物料不同,而有所差異) Weighing range will be different according to different ingredient.
電源 Power Supply	AC220V,50/60Hz,3P,3.0KW (Can be transformed to local voltage)
氣壓需求 Compressed Air	6Kg/c m ² (0.6MPa)
外型尺寸 Dimension	1100mm(L)x750mm(W)x2165mm(H)
重量 Weight	320 Kg
標準配備 Standard Accessories	觸控人機面板 Touch panel HMI 靜電消除裝置 Static Ionizing Generators 標籤檢知感測器 Tag detector 超音波過載保護 Ultrasonic overload protection 下料振動機構 Fluidizer to prevent bridging 料槽快速排料裝置。Quickly cleaning ingredient device
選購配備 Option	輸送帶單元 Conveyer